

## WALL MOUNTED

**Basic :** ASYG07LLCC / ASYG09LLCC / ASYG12LLCC




Wireless R.C.



### Features


#### High efficient compact design

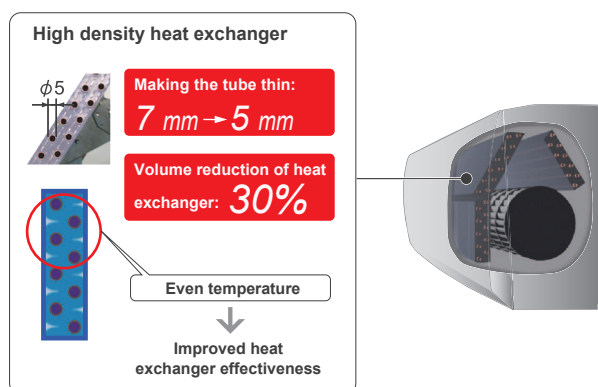

#### ON-OFF Programmable timer

You can set an integrated ON-OFF or OFF-ON timer suitable for your life style.

(Setting time: 0.5, 1, 1.5, 2, 2.5, -----9.5, 10, 11, 12 hours)

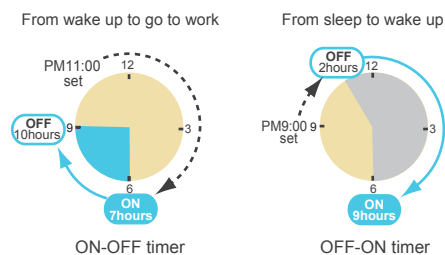

#### Super Quiet Operation

Top class low noise operation by new airflow construction. Our quiet operation makes the more comfortable environment in a bed room and a study room, etc.




#### Powerful operation


20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

#### Economy operation

Setting temp. is shifted by 1°C automatically.

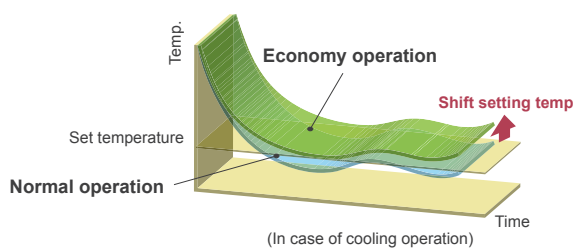

#### Low ambient operation



#### Optional parts

Remote Controller Holder: UTZ-RXLA



## Specifications

				Indoor unit		ASYG07LLCC		ASYG09LLCC		ASYG12LLCC	
Model No.		Outdoor unit		AOYG07LLCC		AOYG09LLCC		AOYG12LLCC			
Power Source				V/Ø/Hz		230/1/50		230/1/50		230/1/50	
Capacity	Cooling		kW	2.0 (0.9-2.8)		2.5 (0.9-3.0)		3.4 (0.9-3.8)			
	Heating			2.7 (0.9-3.6)		3.0 (0.9-3.8)		4.0 (0.9-5.0)			
Input Power	Cooling/Heating		kW	0.470/0.620		0.730/0.740		1.080/1.130			
EER	Cooling		W/W	4.26		3.42		3.15			
COP	Heating			4.35		4.05		3.54			
Pdesign	Cooling/Heating (@-10°C)		kW	2.0/2.2		2.5/2.3		3.4/3.2			
SEER	Cooling		W/W	6.70		6.90		6.60			
SCOP	Heating (Average)			4.00		4.00		3.80			
Energy Efficiency Class	Cooling		A++		A++		A++				
	Heating (Average)		A+		A+		A				
Running Current	Cooling/Heating		A	2.6/3.0		3.5/3.5		5.2/5.4			
Annual Energy Consumption	Cooling		kWh/a	104		127		180			
	Heating			770		805		1,179			
Moisture Removal				l/h		1.0		1.3		1.8	
Sound Pressure (Cooling)	Indoor	H/M/L/Q	dB(A)	43/38/33/22		43/38/33/22		43/38/33/22			
	Outdoor	High		47		47		50			
Sound Power (Cooling)	Indoor	High		59		59		59			
	Outdoor	High		61		61		65			
Airflow Rate (High)		Indoor / Outdoor		m³/h	720/1,670		720/1,670		720/1,830		
Net Dimension H x W x D	Indoor			mm	262×820×206		262×820×206		262×820×206		
				kg(lbs)	7.0 (15)		7.0 (15)		7.0 (15)		
	Outdoor			mm	535×663×293		535×663×293		535×663×293		
				kg(lbs)	24 (53)		24 (53)		26 (57)		
Piping Connections (Small / Large)				mm	6.35/9.52		6.35/9.52		6.35/9.52		
Drain Hose Diameter (I.D./O.D.)					13.8/15.8 to 16.7		13.8/15.8 to 16.7		13.8/15.8 to 16.7		
Max Pipe Length (Pre-Charge)				m	20 (15)		20 (15)		20 (15)		
Max Height Difference					15		15		15		
Operation Range	Cooling		°CDB	-10 to 43		-10 to 43		-10 to 43			
	Heating			-15 to 24		-15 to 24		-15 to 24			
Refrigerant (Global Warming Potential)				R410A (1,975)		R410A (1,975)		R410A (1,975)			

## Dimensions Models : ASYG07LLCC / ASYG09LLCC / ASYG12LLCC

(Unit : mm)

